


Rajack Designs, Ltd.




Please Call For Assistance
Ph: 631-293-8273
Fax: 631-293-3617
e-mail: Support@rajack.com

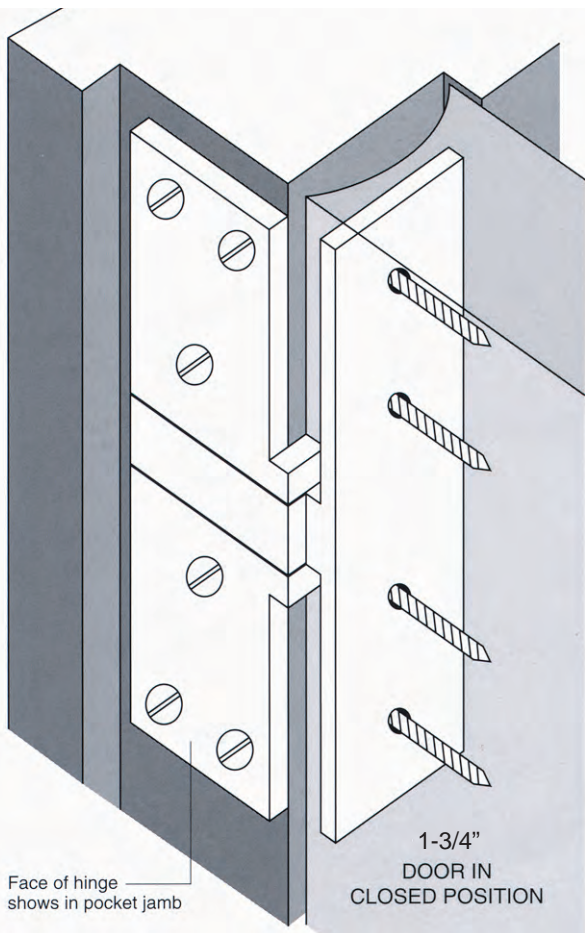

This hinge allows a door to swing clear of the opening and fold back into a pocket at right angle to the closed position. No part of the hinge projects beyond the face of the door in either opened or closed position.

Interesting architectural effects are made possible by the use of this hinge. The door can be designed in such a way that when in the pocket, it forms a deep paneled reveal. Its use is not confined to traditional design, but is equally effective in contemporary work.

Detail shown for 1-3/4" door thickness

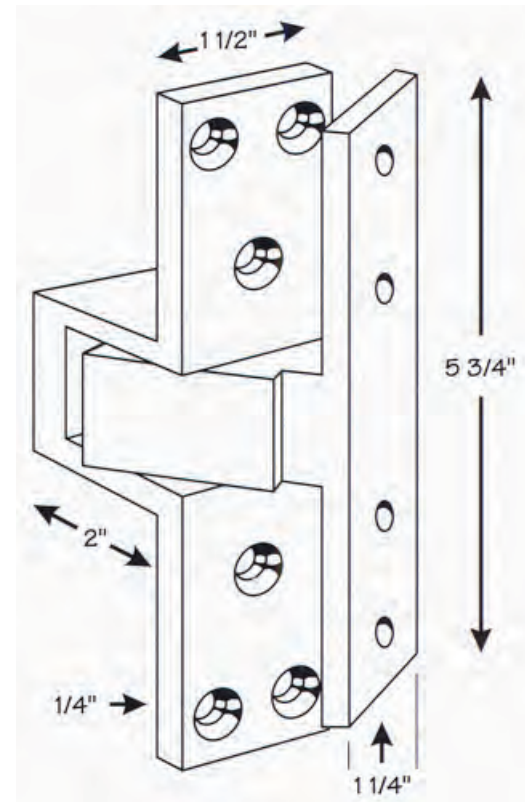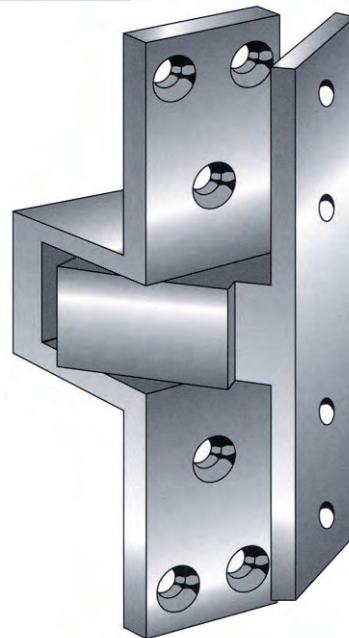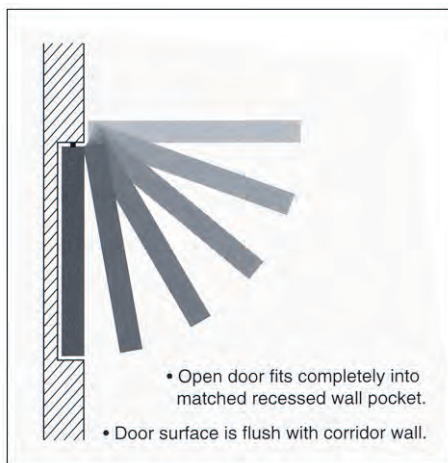

Harmon Hinge Information - for specifying and ordering

Rajack - Custom Harmon Hinge

The Rajack Harmon Hinge is a hand made, pocket door hinge. The base metal is solid brass or bronze only. It is available in every finish we offer. Custom finishes required must be accompanied by a sample or a sample to match existing hardware. This hinge folds back into a pocket at a right angle to the closed position of the door.

Cost depends on door thickness size, e.g., 1 1/4", 1 3/8", 1 3/4", 2", 2 1/4", 2 1/2", 3"
Other sizes may be quoted and custom made. The door thickness is vital information in order for us to quote or for an order to be processed. The maximum swing for this hinge is 120 degrees. It is feasible to use a pair and a half or two pair on a very heavy and/or tall door. Only a small portion of this hinge is visible when installed.

Lead time is generally 2 - 6 weeks, depending on finish required and shop schedule. Please advise individuals handling this special hardware not to take them apart.

We advise not to schedule plating by others if it can be avoided. They are to be installed by a qualified mechanic who is familiar with the proper installation. Also note, that the socket heads on each hinge must all be facing out or all inward when installed. All doors and jambs must be absolutely straight and plumb. All doors must be checked for bowing traits, if so, they will buckle and not operate, this will result in costly damage.

We recommend and offer consultation regarding all aspects of the Harmon Hinge, as well as all other Rajack Hardware before specifying, ordering and installation.